

FARM GATES


LEGEND

- 1 — 125 - 150mm TOP DIAMETER x 2100 mm TREATED TIMBER POST
CORNER, STRAINING, GATE AND ANCHOR POSTS
- 3 — 4mm x 4 STRANDS TWISTED SOFT GALVANISED BINDING WIRE
- 4 — 100 - 125mm TOP DIAMETER x 1800 mm TREATED TIMBER POST
BRACES IN BOX ANCHORS

NGL NATURAL GROUND LEVEL

NOTES:

THIS DRAWING TO BE READ IN CONJUNCTION WITH THE PROJECT PARTICULAR
SPECIFICATIONS FOR FENCES

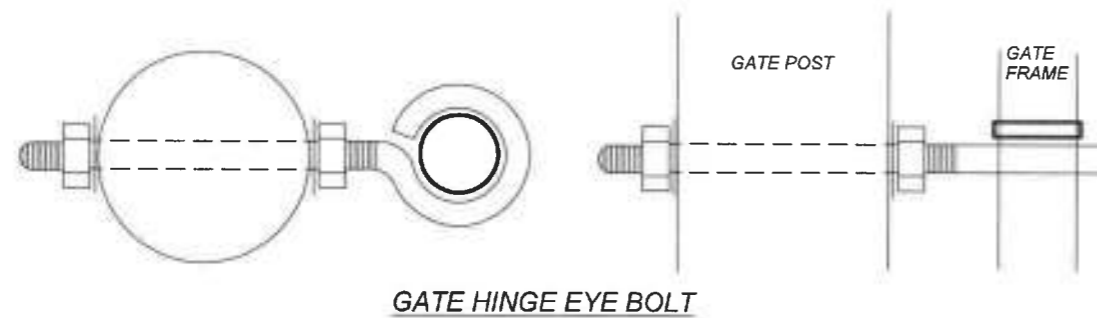

NO:	SPECIAL NOTES:	APPROVED:	PROJECT:	SCALE:	INDEX NO.:
1.	The office must be notified for inspections at the following stages: - After excavation of the plunge dip; before concrete is placed. - After placing of the formwork. - Before any welding is started on site.	JPJ KOCH (CHIEF ENGINEER)	RURAL DEVELOPMENT AND AGRARIAN REFORM PROVINCE OF THE EASTERN CAPE	SCALE NTS	INDEX NO.: SCMM001/22/08
2.	All hor. CFLC welded to vert. IPE-sections according to SANS specifications.	DECEMBER 2020 (DATE APPROVED)	ENGINEERING SERVICES Private Bag X015 DÖHNE ADI STUTTERHEIM 4930	A3 ORIGINAL	PLAN NO.: SHEET 8 OF 8
3.	Grouted stone pitching: 1 cement, 2 washed river sand, 100-150mm stone.				